



PRESS BRAKES MADE IN ITALY SINCE 1958

## **SHEAR MACHINE**





# SCR

## Competing for *Dynamics*

With a unique operating principle, **SCR** shears are distinguished by their dynamic structural behavior and cutting quality.

The mechanical system offers a high quality cut without vibration, thus increasing the machine's useful life.

# Cutting perfect



#### BEST CUT, BEST DURABILITY.

Vertical cutting is the most effective and accurate system compared to alternative ones. Here it is possible to adjust the cutting angle depending on the type of material and thickness of the plate.

## Details that makes the ***difference***




#### / Vertical cut

This system guarantees the homogeneous distribution of force along the entire length, which results in a smooth and a vibration-free cut.



#### / Variable rake angle

In order to minimize the "helix" effect of the sheet, the SCR shear allows to vary the angle depending on the thickness of the sheet. This rake variation is done automatically.

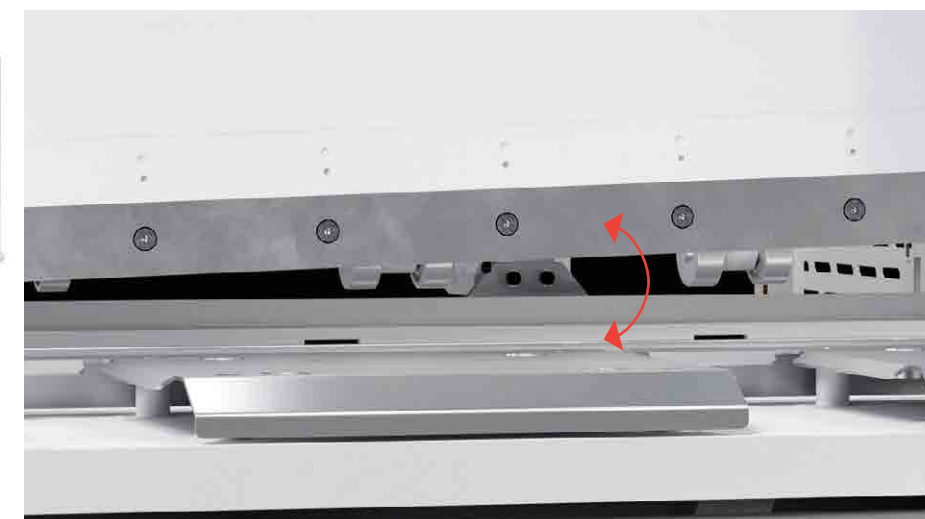

#### / RAE System

While cutting, the back gauge automatically retracts to avoid collision with the plate.



#### VERSATILITY

With a cutting capacity of 4 mm to 40 mm thick. And from 1.2 m to 8 m in length, the SCR shear has a wide variety of solutions and automation.

Overcoming  
all  
the  
expectations



# Strong & *Reliable*

SCR is the ideal solution to achieve demanding levels of productivity, precision and safety.

.01 SCR range

.SCR

CAPACITY	LENGTH (mm)						
	1250	1550	2050	2550	3050	4050	6050
4 mm	o	●	●	●	●	●	●
6 mm		o	●	●	●	●	●
8 mm			●	●	●	●	●
10 mm			●	●	●	●	●
13 mm			●	●	●	●	●
16 mm			o		●	●	o
20 mm					●	●	
25 mm					●	o	
30 mm					●		
35 mm					●		
40 mm					●		



● Standard    o Under request





. Standard equipment

Type	
Control	Elgo P40
Systems	Vertical cut
	Automatic variable rake angle
	Automatic cutting lenght
	RAE - Automatic retraction
	Standby function
Frontal supports	1000 mm squaring arm
	1000 mm single support
Frontal safety	Mechanical finger protection
Rear safety	Safety barriers (type IV)
Back gauge	BGS
Others	Hanging swivel control panel
	Cutting lighting shadow line
	LED table lighting
	Hold down jacks performing progressive load with Fibroflex
	2 operating modes: continuous or cycle-by-cycle cut
	Independent hold down jacks (pre-selected)
	Frontal table with ball joints
	Hours counter

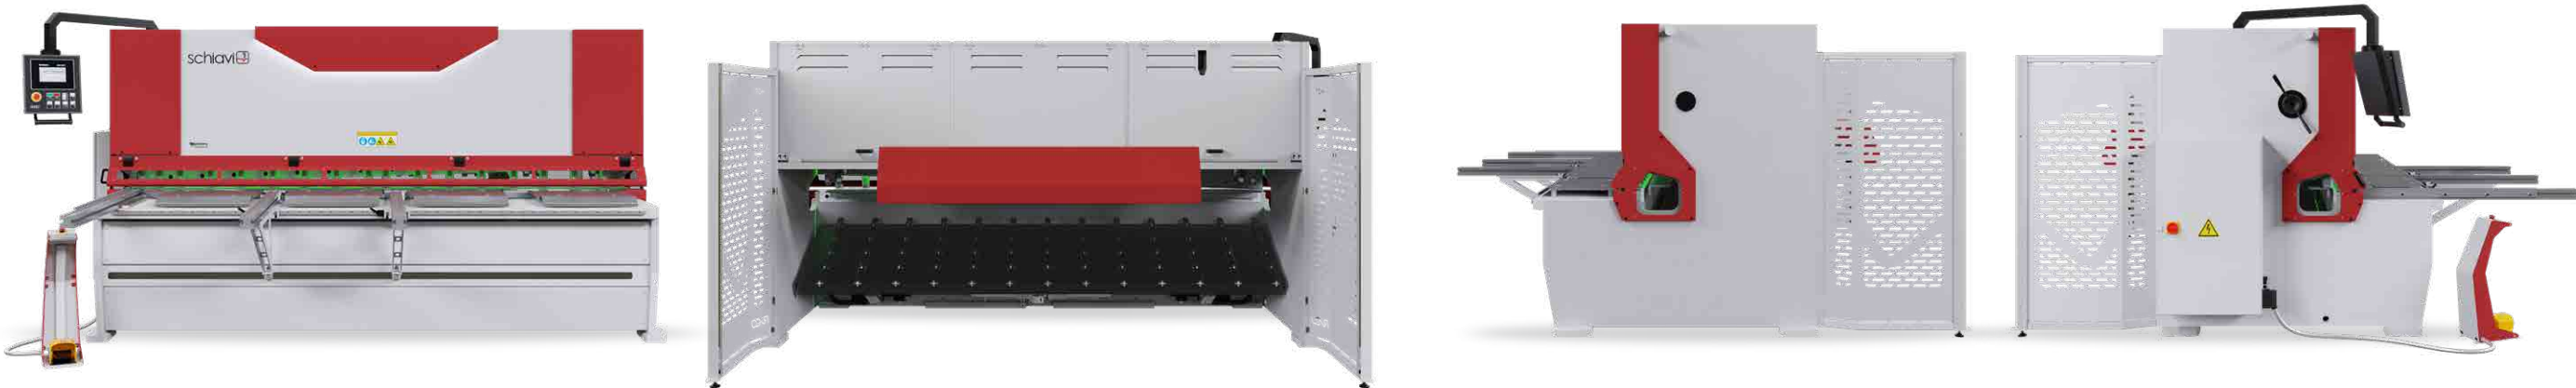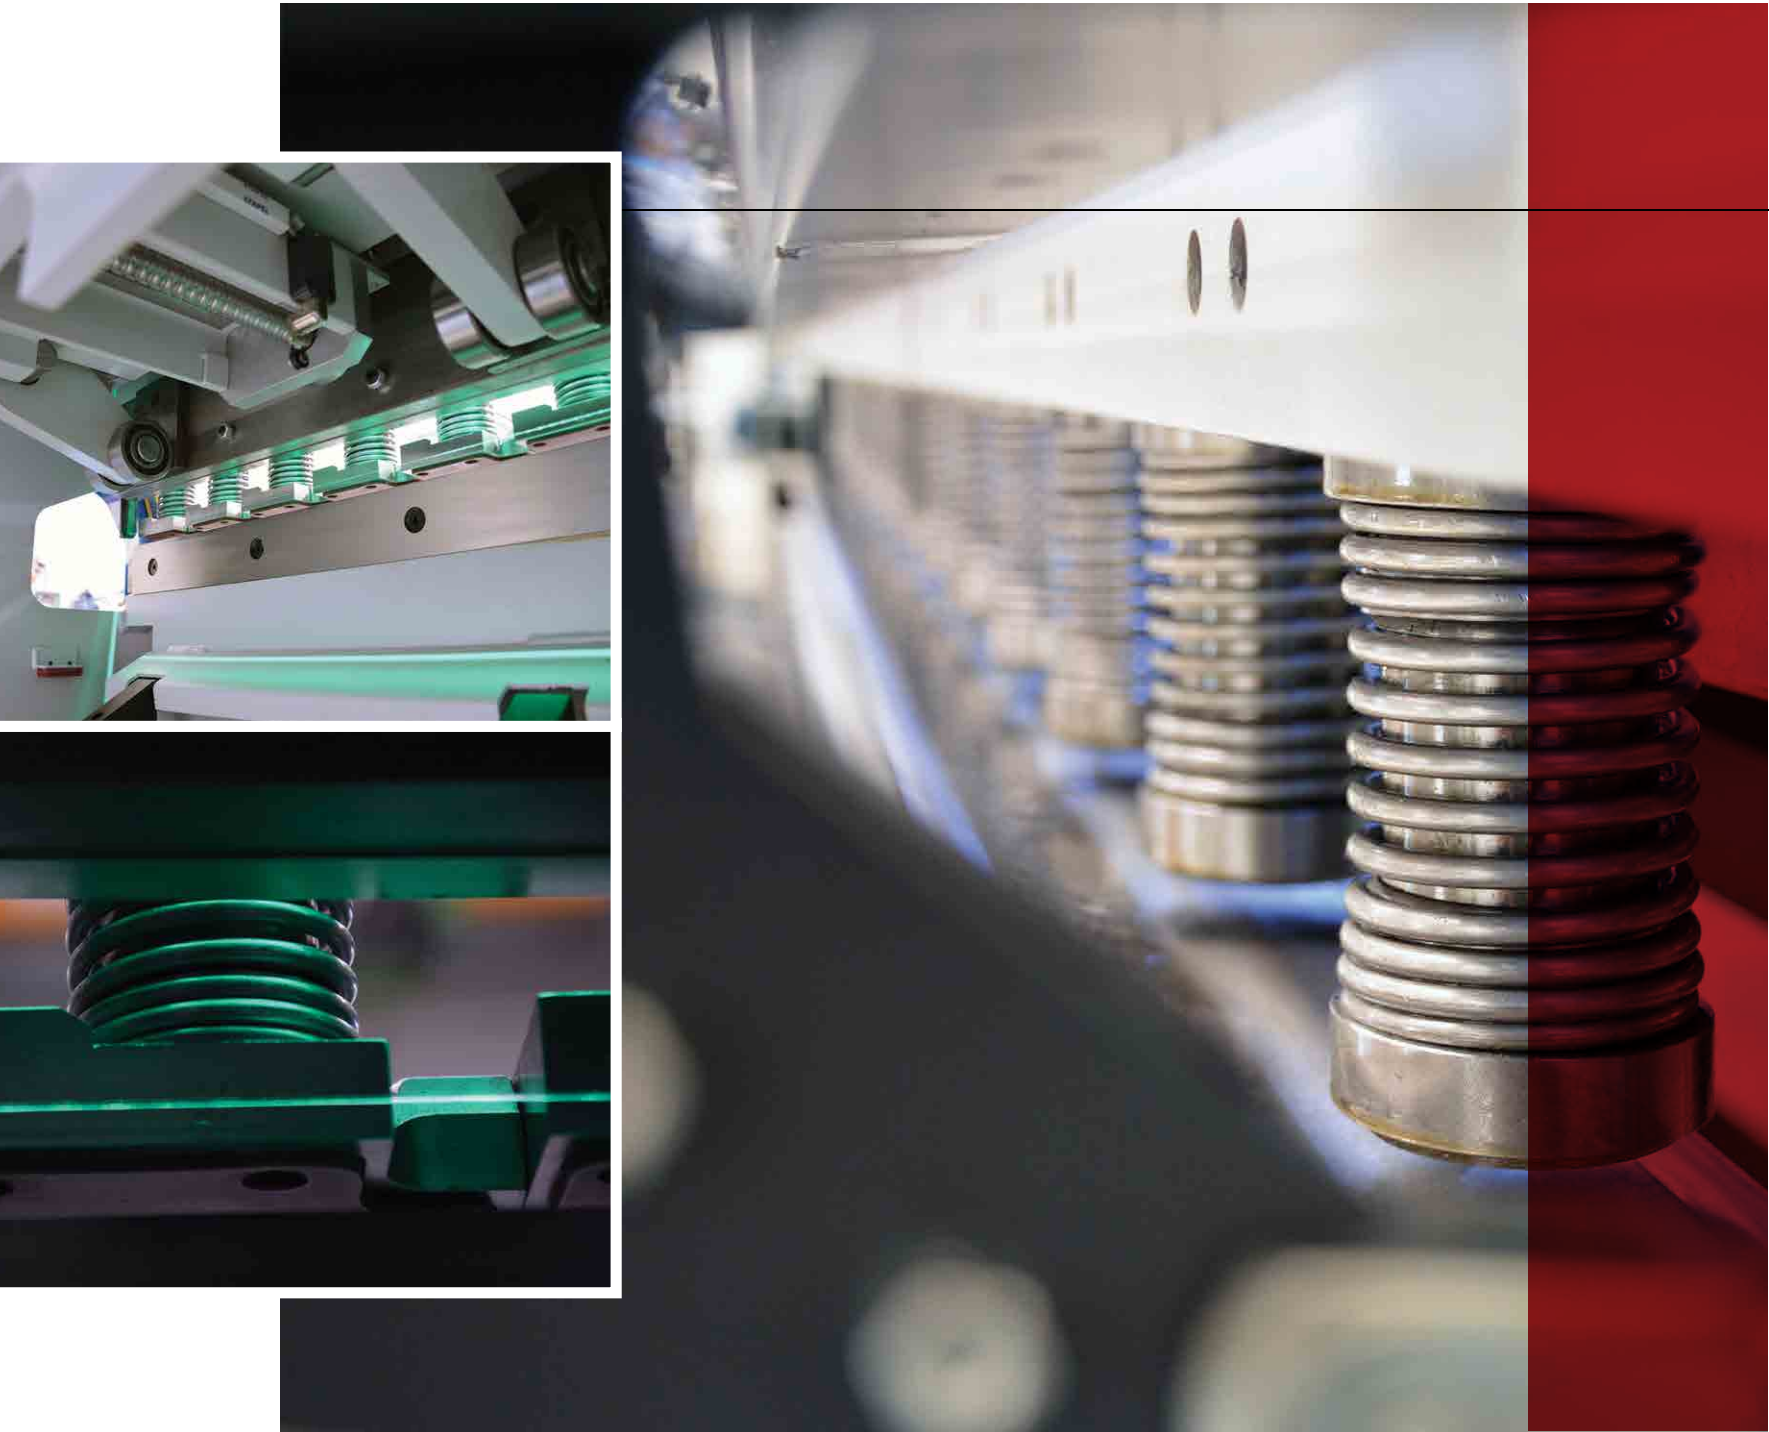



. Controls



ELGO  
ELECTRONIC

Delem

CYBELEC

Models	P 40 <sup>S</sup>	P 40T	DAC-360T	CybTouch 8G
Memory capacity (lines)	1000	1000	2500	4800
Screen	2.7" LCD	5.7" TFT	7" TFT	7" CRT
Touch screen	-	●	●	●
Materials list	3	3	6	10
Cuts counter	Ascending	Ascending/ descendant	Programmable	Programmable
Programming of:				
- Retraction	-	-	●	●
- Pressure	-	●	●	●
- Length	●	●	●	●
Control of:				
- Pneumatic sheet support	-	●	●	●
- Angle	●	●	●	●
- Blade gap	○	○	●	●
Offline software	-	-	DAC-360T	-

Standard    Optional




# Front Feeder SCR

## Automatic feeder.

SCR Front Feeder the ideal solution to reach demanding productivity and cadence levels.

It includes automatic positioning grippers that allows to perform programed cuts from entire plates, in a continuous way.



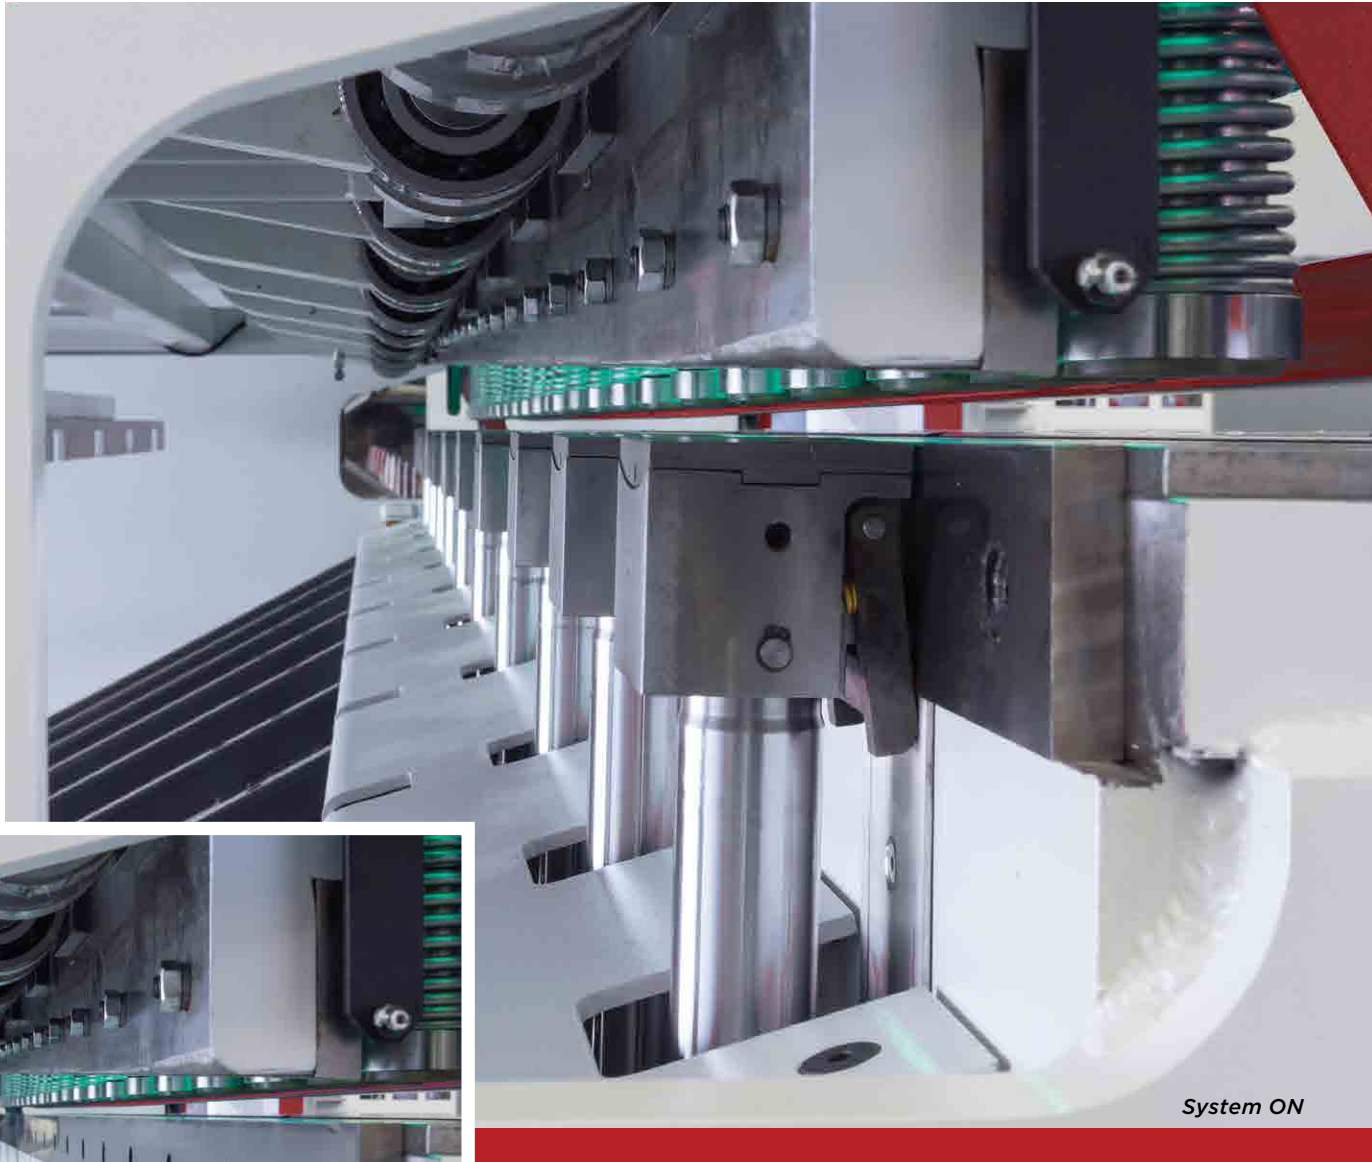

# Anti-Twist

## Flat cutting.

The Anti Twist is a hydraulic system, with cylinders installed in the lower area of the shear, which exerts force against the sheet to be cut, keeping it straight during the cutting process.


Cylinders are installed along the entire length of the machine. The system is activated on the control panel in an automatic way. The movement is synchronized with the blade holder and the force is distributed progressively.

Technical data	
Cylinders distance	Aprox. 400 mm
Machine capacity reduction with ANTI TWIST	Aprox. 30%
Minimum cutting width	20 mm

## . Rear sheet support & extraction systems


### MAC 1

- . Pneumatic sheet support with automatic drive;
- . Adjustable speed;
- . Tilting movement from the sheet extraction ramp.

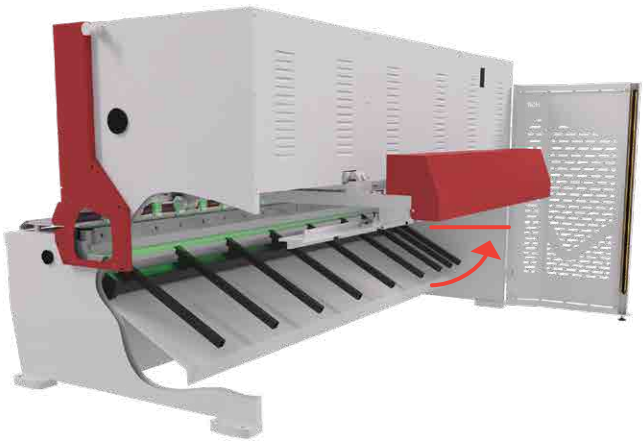

### MAC 2

- . Pneumatic sheet support with automatic drive;
- . Adjustable speed;
- . Multiple cylinders installed in the back gauge;
- . Linear movement parallel to the sheet to be cut.

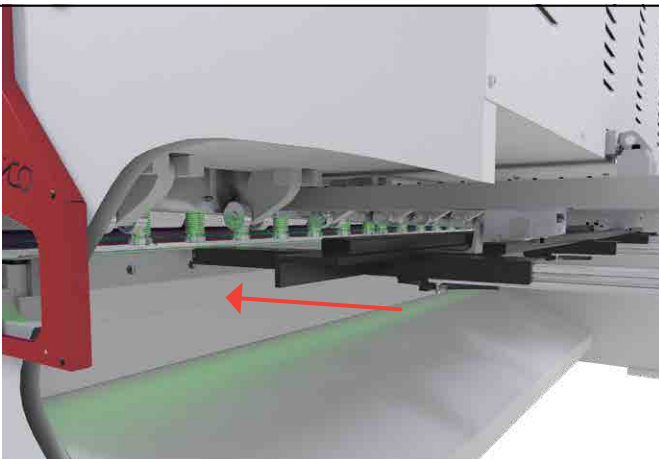

### FSE

- . Front sheet extraction system up to 450 mm length;
- . Includes 1 extraction drawer.



*FSE system is only available with MAC2 or without pneumatic support.*


MAC 3

- . Pneumatic sheet support with automatic drive;
- . Adjustable speed;
- . Linear movement vertical and perpendicular to the sheet to be cut;
- . Conveyor sheet extraction with belts;
- . 3 operating modes;
- . Sheet scrap box.



MAC X

- . Servo-pneumatic sheet support with automatic drive;
- . Adjustable speed;
- . Double movement: vertical and tilting;
- . Ensures full support of the sheet during cutting.

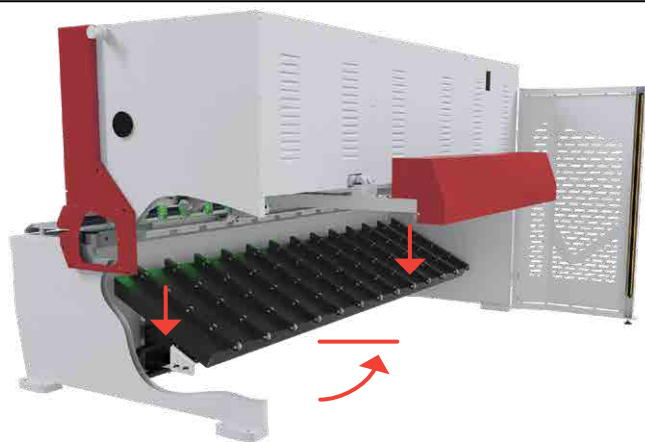

RTS - Return to Sender

- RTS System - Return to Sender allows you to send the cut sheet directly to the operator via the entry zone.
- . Motorized auto accompaniment;
  - . Controlled by CNC.

Only available with MacX.



Back gauges

BGS

- . AC motor
- . Ball screws
- . Belt transmission
- . Speed: 70 mm/s
- . Accuracy:  $\pm 0,10$  mm

BGA

- . Brushless servo motor
- . Ball screws
- . Belt transmission
- . Speed: 250mm/s
- . Accuracy:  $\pm 0.05$  mm




. Frontal Safety

Tilting finger protection




Photoelectric barriers

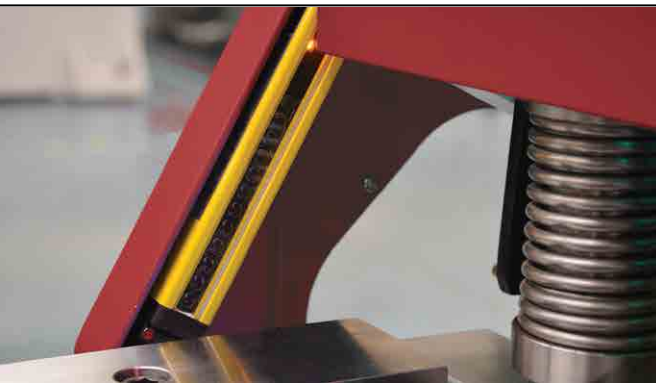

. Other opcionals

Laser cutting line

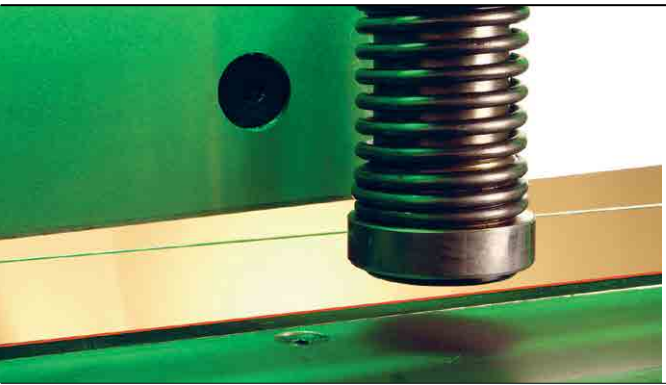

Frontal sheet extraction ramp







THICK METAL CUTTING



Competing  
for **Heavy Duty**



**SCHIAVI MACCHINE INTERNATIONAL SRL**

Ghisalba (BG), Via San Pietro 16, CAP 24050

email: [sales@schiavimacchine.it](mailto:sales@schiavimacchine.it)  
ph: +39 035 4242446

[www.schiavimacchine.it](http://www.schiavimacchine.it)

